


Caratteristiche del profilo <i>Profile features</i>		
Spessore <i>Thickness</i> mm	Peso <i>Weight</i>	
	kg/m ²	kg/m
0,7	9,64	5,5
0,8	11,02	6,28
1	13,77	7,85
1,2	16,53	9,42

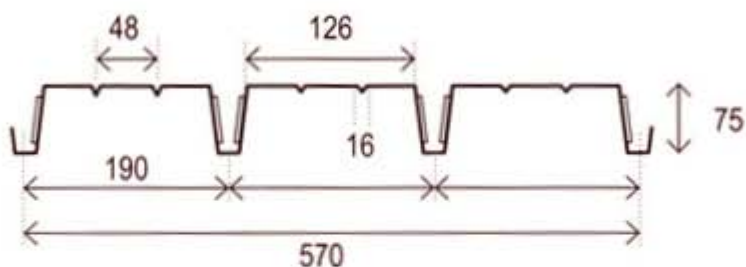

SOLETTA/SLAB H=12cm

▲▲ 1 CAMPATA/SPAN

Spessore <i>Thickness</i> mm	Sovraccarico di esercizio utile uniformemente distribuito <i>Uniformly distributed overload kN/m²</i>															
	1,5	2	2,5	3	3,5	4	4,5	5	5,5	6	7	8	10	12	15	20
Luce massima per solai in <i>Maximum floor clear span in m</i>																
0,7	3,10	3,10	2,99	2,68	2,44	2,26	2,11	1,99	1,88	1,79	1,64	1,52	1,34	1,22	1,08	0,92
0,8	3,25	3,25	3,25	3,03	2,75	2,53	2,36	2,21	2,09	1,98	1,81	1,67	1,47	1,32	1,17	0,99
1	3,45	3,45	3,45	3,45	3,35	3,05	2,82	2,63	2,47	2,33	2,11	1,94	1,68	1,51	1,32	1,09
1,2	3,65	3,65	3,65	3,65	3,54	3,24	3,00	2,80	2,63	2,49	2,25	2,07	1,81	1,62	1,42	1,09

▲▲▲▲ n CAMPATE/SPANS

Spessore <i>Thickness</i> mm	Sovraccarico di esercizio utile uniformemente distribuito <i>Uniformly distributed overload kN/m²</i>															
	1,5	2	2,5	3	3,5	4	4,5	5	5,5	6	7	8	10	12	15	20
Luce massima per solai in <i>Maximum floor clear span in m</i>																
0,7	3,40	3,40	3,40	3,40	3,28	2,99	2,76	2,57	2,41	2,22	1,90	1,66	1,33	1,11	0,89	0,67
0,8	3,75	3,75	3,75	3,50	3,17	2,91	2,71	2,53	2,39	2,27	2,05	1,79	1,43	1,20	0,96	0,72
1	4,00	4,00	3,89	3,55	3,29	3,07	2,90	2,75	2,62	2,51	2,31	2,02	1,62	1,35	1,08	0,81
1,2	4,25	4,25	3,89	3,55	3,29	3,07	2,90	2,75	2,62	2,51	2,32	2,11	1,69	1,41	1,12	0,84

SOLETTA/SLAB H=13cm

▲▲ 1 CAMPATA/SPAN

Spessore Thickness mm	Sovraccarico di esercizio utile uniformemente distribuito <i>Uniformly distributed overload kN/m²</i>															
	1,5	2	2,5	3	3,5	4	4,5	5	5,5	6	7	8	10	12	15	20
Luce massima per solai in <i>Maximum floor clear span in m</i>																
0,7	3,00	3,00	3,00	2,89	2,64	2,44	2,27	2,14	2,03	1,93	1,76	1,64	1,44	1,31	1,16	0,99
0,8	3,20	3,20	3,20	3,20	2,99	2,74	2,55	2,39	2,26	2,14	1,95	1,80	1,58	1,42	1,25	1,07
1	3,40	3,40	3,40	3,40	3,40	3,34	3,08	2,87	2,69	2,54	2,29	2,10	1,83	1,63	1,42	1,20
1,2	3,60	3,60	3,60	3,60	3,60	3,53	3,26	3,04	2,86	2,70	2,44	2,25	1,95	1,75	1,53	1,24

▲▲▲▲ N CAMPATE/SPANS

Spessore Thickness mm	Sovraccarico di esercizio utile uniformemente distribuito <i>Uniformly distributed overload kN/m²</i>															
	1,5	2	2,5	3	3,5	4	4,5	5	5,5	6	7	8	10	12	15	20
Luce massima per solai in <i>Maximum floor clear span in m</i>																
0,7	3,15	3,15	3,15	3,15	3,01	2,78	2,59	2,44	2,30	2,19	2,00	1,81	1,45	1,21	0,97	0,73
0,8	3,65	3,65	3,65	3,65	3,44	3,16	2,93	2,74	2,59	2,45	2,23	1,95	1,56	1,30	1,04	0,78
1	3,95	3,95	3,95	3,76	3,48	3,25	3,07	2,91	2,78	2,66	2,46	2,20	1,76	1,47	1,17	0,88
1,2	4,20	4,20	4,12	3,76	3,48	3,25	3,07	2,91	2,78	2,66	2,46	2,30	1,84	1,53	1,22	0,92

SOLETTA/SLAB H=14cm

▲▲ 1 CAMPATA/SPAN

Spessore Thickness mm	Sovraccarico di esercizio utile uniformemente distribuito <i>Uniformly distributed overload kN/m²</i>															
	1,5	2	2,5	3	3,5	4	4,5	5	5,5	6	7	8	10	12	15	20
Luce massima per solai in <i>Maximum floor clear span in m</i>																
0,7	2,90	2,90	2,90	2,90	2,82	2,61	2,43	2,29	2,16	2,06	1,88	1,75	1,54	1,39	1,23	1,05
0,8	3,05	3,05	3,05	3,05	3,05	2,95	2,74	2,56	2,42	2,29	2,09	1,93	1,69	1,52	1,34	1,14
1	3,35	3,35	3,35	3,35	3,35	3,35	3,33	3,10	2,90	2,74	2,47	2,26	1,96	1,75	1,52	1,28
1,2	3,55	3,55	3,55	3,55	3,55	3,55	3,52	3,28	3,08	2,91	2,63	2,41	2,10	1,87	1,64	1,38

▲▲▲▲ N CAMPATE/SPANS

Spessore Thickness mm	Sovraccarico di esercizio utile uniformemente distribuito <i>Uniformly distributed overload kN/m²</i>															
	1,5	2	2,5	3	3,5	4	4,5	5	5,5	6	7	8	10	12	15	20
Luce massima per solai in <i>Maximum floor clear span in m</i>																
0,7	3,00	3,00	3,00	3,00	3,00	2,98	2,78	2,61	2,46	2,34	2,14	1,96	1,57	1,30	1,04	0,78
0,8	3,45	3,45	3,45	3,45	3,45	3,40	3,15	2,95	2,78	2,63	2,39	2,11	1,69	1,41	1,12	0,84
1	3,90	3,90	3,90	3,90	3,66	3,43	3,23	3,06	2,92	2,80	2,59	2,37	1,90	1,58	1,27	0,95
1,2	4,15	4,15	4,15	3,96	3,66	3,43	3,23	3,06	2,92	2,80	2,59	2,42	1,98	1,65	1,32	0,99

SOLETTA/SLAB H=15cm

▲▲ 1 CAMPATA/SPAN

Spessore Thickness mm	Sovraccarico di esercizio utile uniformemente distribuito <i>Uniformly distributed overload kN/m²</i>															
	1,5	2	2,5	3	3,5	4	4,5	5	5,5	6	7	8	10	12	15	20
Luce massima per solai in <i>Maximum floor clear span in m</i>																
0,7	2,80	2,80	2,80	2,80	2,80	2,77	2,58	2,43	2,30	2,18	2,00	1,85	1,63	1,47	1,30	1,11
0,8	2,95	2,95	2,95	2,95	2,95	2,95	2,92	2,73	2,58	2,44	2,22	2,05	1,79	1,61	1,42	1,20
1	3,20	3,20	3,20	3,20	3,20	3,20	3,20	3,20	3,11	2,93	2,64	2,42	2,09	1,87	1,62	1,36
1,2	3,45	3,45	3,45	3,45	3,45	3,45	3,45	3,45	3,30	3,11	2,81	2,58	2,24	2,00	1,74	1,47

▲▲▲▲ N CAMPATE/SPANS

Spessore Thickness mm	Sovraccarico di esercizio utile uniformemente distribuito <i>Uniformly distributed overload kN/m²</i>															
	1,5	2	2,5	3	3,5	4	4,5	5	5,5	6	7	8	10	12	15	20
Luce massima per solai in <i>Maximum floor clear span in m</i>																
0,7	2,80	2,80	2,80	2,80	2,80	2,80	2,80	2,77	2,62	2,49	2,27	2,10	1,68	1,40	1,12	0,84
0,8	3,25	3,25	3,25	3,25	3,25	3,25	3,25	3,15	2,96	2,80	2,55	2,26	1,81	1,51	1,20	0,90
1	3,80	3,80	3,80	3,80	3,80	3,59	3,38	3,21	3,06	2,93	2,71	2,54	2,03	1,69	1,36	1,02
1,2	4,10	4,10	4,10	4,10	3,84	3,59	3,38	3,21	3,06	2,93	2,71	2,54	2,12	1,77	1,41	1,06