


Caratteristiche del profilo <i>Profile features</i>			
Spessore Thickness mm	Peso Weight kg/m ²	Peso Weight	
		1000	1250
		kg/m	
0,7	9,16	5,5	6,87
0,8	10,47	6,28	7,85
1	13,08	7,85	9,81
1,2	15,7	9,42	11,78

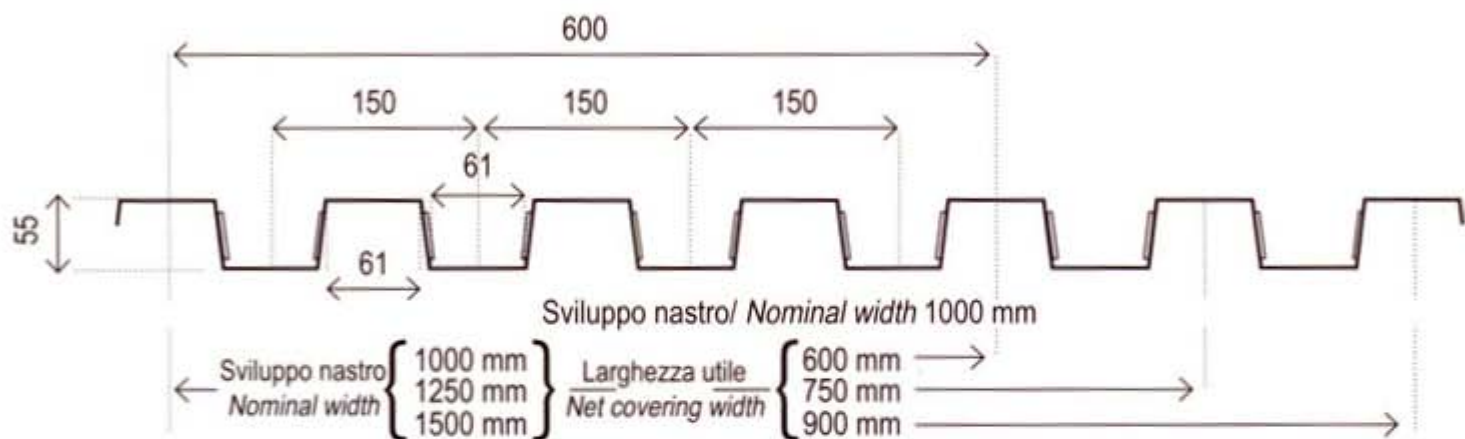

SOLETTA/SLAB H=10cm

▲▲ 1 CAMPATA/SPAN

Spessore Thickness mm	Sovraccarico di esercizio utile uniformemente distribuito <i>Uniformly distributed overload kN/m²</i>															
	1,5	2	2,5	3	3,5	4	4,5	5	5,5	6	7	8	10	12	15	20
Luce massima per solai in <i>Maximum floor clear span in m</i>																
0,7	2,45	2,45	2,45	2,45	2,45	2,45	2,45	2,37	2,22	2,09	1,89	1,73	1,50	1,34	1,17	0,98
0,8	2,55	2,55	2,55	2,55	2,55	2,55	2,55	2,52	2,36	2,23	2,02	1,86	1,61	1,44	1,26	1,06
1	2,75	2,75	2,75	2,75	2,75	2,75	2,75	2,75	2,63	2,49	2,26	2,09	1,82	1,64	1,44	1,22
1,2	2,90	2,90	2,90	2,90	2,90	2,90	2,90	2,90	2,82	2,67	2,43	2,24	1,97	1,77	1,55	1,32

▲▲▲▲ N CAMPATE/SPANS

Spessore Thickness mm	Sovraccarico di esercizio utile uniformemente distribuito <i>Uniformly distributed overload kN/m²</i>															
	1,5	2	2,5	3	3,5	4	4,5	5	5,5	6	7	8	10	12	15	20
Luce massima per solai in <i>Maximum floor clear span in m</i>																
0,7	2,85	2,85	2,85	2,85	2,85	2,82	2,65	2,52	2,40	2,30	2,13	1,99	1,73	1,54	1,34	1,02
0,8	3,00	3,00	3,00	3,00	3,00	2,82	2,65	2,52	2,40	2,30	2,13	1,99	1,78	1,63	1,44	1,14
1	3,20	3,20	3,20	3,20	3,01	2,82	2,65	2,52	2,40	2,30	2,13	1,99	1,78	1,63	1,45	1,24
1,2	3,40	3,40	3,40	3,25	3,01	2,82	2,65	2,52	2,40	2,30	2,13	1,99	1,78	1,63	1,45	1,26

▲▲ 1 CAMPATA/SPAN

Spessore Thickness mm	Sovraccarico di esercizio utile uniformemente distribuito <i>Uniformly distributed overload kN/m²</i>															
	1,5	2	2,5	3	3,5	4	4,5	5	5,5	6	7	8	10	12	15	20
Luce massima per solai in <i>Maximum floor clear span in m</i>																
0,7	2,35	2,35	2,35	2,35	2,35	2,35	2,35	2,35	2,35	2,28	2,06	1,88	1,63	1,45	1,26	1,06
0,8	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,43	2,19	2,01	1,75	1,56	1,36	1,15
1	2,75	2,75	2,75	2,75	2,75	2,75	2,75	2,75	2,75	2,71	2,47	2,27	1,98	1,78	1,56	1,32
1,2	2,90	2,90	2,90	2,90	2,90	2,90	2,90	2,90	2,90	2,90	2,64	2,44	2,13	1,92	1,68	1,43

▲▲▲▲ N CAMPATE/SPANS

Spessore Thickness mm	Sovraccarico di esercizio utile uniformemente distribuito <i>Uniformly distributed overload kN/m²</i>															
	1,5	2	2,5	3	3,5	4	4,5	5	5,5	6	7	8	10	12	15	20
Luce massima per solai in <i>Maximum floor clear span in m</i>																
0,7	2,70	2,70	2,70	2,70	2,70	2,70	2,70	2,69	2,57	2,46	2,28	2,13	1,88	1,67	1,45	1,12
0,8	2,95	2,95	2,95	2,95	2,95	2,95	2,84	2,69	2,57	2,46	2,28	2,13	1,90	1,74	1,56	1,24
1	3,20	3,20	3,20	3,20	3,20	3,01	2,84	2,69	2,57	2,46	2,28	2,13	1,90	1,74	1,56	1,35
1,2	3,35	3,35	3,35	3,35	3,22	3,01	2,84	2,69	2,57	2,46	2,28	2,13	1,90	1,74	1,56	1,35

SOLETTA/SLAB H=12cm

▲▲ 1 CAMPATA/SPAN

Spessore Thickness mm	Sovraccarico di esercizio utile uniformemente distribuito <i>Uniformly distributed overload kN/m²</i>															
	1,5	2	2,5	3	3,5	4	4,5	5	5,5	6	7	8	10	12	15	20
Luce massima per solai in <i>Maximum floor clear span in m</i>																
0,7	2,25	2,25	2,25	2,25	2,25	2,25	2,25	2,25	2,25	2,25	2,22	2,03	1,75	1,56	1,35	1,13
0,8	2,40	2,40	2,40	2,40	2,40	2,40	2,40	2,40	2,40	2,40	2,36	2,17	1,88	1,67	1,46	1,23
1	2,65	2,65	2,65	2,65	2,65	2,65	2,65	2,65	2,65	2,65	2,65	2,44	2,12	1,90	1,67	1,41
1,2	2,85	2,85	2,85	2,85	2,85	2,85	2,85	2,85	2,85	2,85	2,85	2,84	2,61	2,28	2,05	1,80

▲▲▲▲ n CAMPATE/SPANS

Spessore Thickness mm	Sovraccarico di esercizio utile uniformemente distribuito <i>Uniformly distributed overload kN/m²</i>															
	1,5	2	2,5	3	3,5	4	4,5	5	5,5	6	7	8	10	12	15	20
Luce massima per solai in <i>Maximum floor clear span in m</i>																
0,7	2,65	2,65	2,65	2,65	2,65	2,65	2,65	2,65	2,65	2,61	2,42	2,26	2,02	1,80	1,56	1,20
0,8	2,90	2,90	2,90	2,90	2,90	2,90	2,90	2,86	2,73	2,61	2,42	2,26	2,02	1,84	1,65	1,34
1	3,15	3,15	3,15	3,15	3,15	3,15	3,01	2,86	2,73	2,61	2,42	2,26	2,02	1,84	1,65	1,43
1,2	3,35	3,35	3,35	3,35	3,35	3,20	3,01	2,86	2,73	2,61	2,42	2,26	2,02	1,84	1,65	1,43